





ARCHITECTURAL BEAMS FOR WALL AND CEILING SPACES

Specify our Beams horizontally or vertically to add new dimensions to your ceiling or wall space with a lightweight and stylish design that are easy to install.

Our Beams are one of the most adaptable styles, which works well with traditional and contemporary architectural designs.

Our Beams are simple to specify and easy to install. Available in 72 standard sizes and 23 standard color options, you can create the perfect solution for your project.

If you have a specific size or color request, customize it. Use our product selector on our website to tell us what color or size you are looking for, and we can help you make your own Beams.

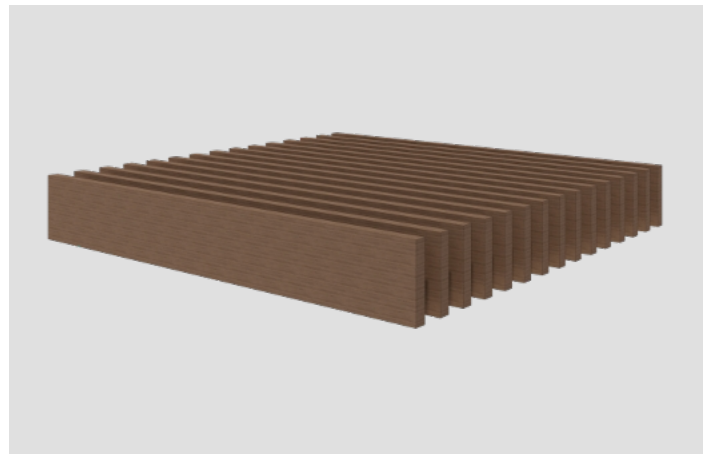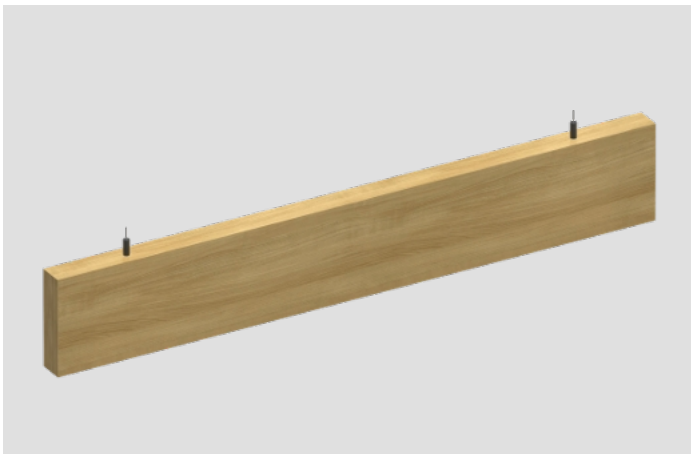

SIZES

Length

24 in	36 in	48 in	60 in	72 in
84 in	96 in	108 in	120 in	132 in
144 in	Custom			

Height

4 in	6 in	8 in	10 in	12 in
Custom				

Thickness

1.5 in	2 in	Custom
--------	------	--------

All sizes are nominal. Refer to Drawing files for actual sizes.

FEATURES

- Simple to specify and easy to install.
- Made with lightweight panel technology.
- Constructed using eco-friendly materials and processes.
- Class A Fire Rating, ASTM E-84 test and CAN/ULC-102.
- Flexibility in design and customization, such as integrating LED lighting.



Intertek Clean Air GOLD Certified
CDPH 01350 v1.2

LAMINATE COLOR OPTIONS

TRADITIONAL



Kensington
Maple
10776-60



Tuscan
Walnut
7921-38



Amber
Cherry
7919-38



Shaker
Cherry
7935-60


PROGRESSIVE




Beigewood
7850-60



Fawn
Cypress
8208K-16



Park Elm
7967K-12



Walnut
Heights
7965-38




Veranda
Teak
8209-28



NeoWalnut
7991-38



Studio Teak
7960-38



Ebony
Recon
7997-38

GRAY



White
Driftwood
8200K-16



5th Ave.
Elm
7966K-12




Portico Teak
8210K-28



Asian Night
7949K-60

SOLID



Designer
White
D354-60



Platinum
D315-60



North Sea
D90-60



Black
1595-60

NEW



Valley
Forge Elm
8231-79



Friston Ash
8229-79

Notes: Colors come in standard HPL laminate finish. Custom colors and finishes are available upon request and may result in a minimal upcharge. Paint-grade finish is also available. If you have a specific laminate in mind that's not in our collection, we can accommodate any commercially available laminate from Wilsonart, Formica, Arborite, Pionite and Nevamar.

PRODUCT SPECIFICATIONS

Name	Altispace Beams
Content	Laminate material, wood frame, fiberboard, honeycomb door core.
Panel Thicknesses	1.5 in, 2 in
Standard Sizes <i>*All sizes are nominal</i>	Lengths: 24 in, 36 in, 48 in, 60 in, 72 in, 84 in, 96 in, 108 in, 120 in, 132 in, 144 in Heights: 4 in 6 in, 8 in, 10 in, 12 in
Durability	Contract/Commercial
Maintenance	Dust and dirt on the panels and suspension hardware can be removed with a vacuum, and wipe off excess dirt or fingerprints by wiping them with a clean, dry and soft cloth. If this does not fully clean the panel, you can use a clean, damp and soft white cloth or sponge with a mild detergent to wipe down the Beams. Refer to the Cleaning and Maintenance document for more details.
Lead Time	Products are made to order and certain lead times will apply.
Environmental	Altispace Beams are made using eco-friendly materials and practices. For more information, contact 226-636-5965.
Custom	Custom sizes and colors are available upon request and may result in a minimal upcharge. Further customization (such as LED lighting integration) are also available at an upcharge.
Variation	Colors of laminate finish on screen may vary from actual product.
Acoustics	Test reports available upon request. Refer to the Acoustic Information document for more details.
Fire Rating	Test reports available upon request. Refer to the Fire Rating Information document for more details.

INSTALL

Suspension Options	1) Aircraft cable (Refer to Suspension Hardware Information) 2) Unistrut System (Refer to Suspension Hardware Information) 3) Flush Mount (Refer to Suspension Hardware Information)
Ceiling Attachment Options for Suspension Cable	By installation contractor
Installation	Refer to Installation Guide for Beams.
Unistrut Installation	Refer to Installation Guide for Beams.



RECYCLED CONTENT

MATERIAL	PRE-CONSUMER	POST CONSUMER	TOTAL
Dorkor	0%	100%	100%
3mm HDF	90%	0%	90%
F/J Pine Frame	0%	0%	0%
High Pressure Laminate	0%	34%	34%

Wall & Ceiling Application



Wall Application



Aircraft Cable Ceiling Application



Flush-Mount Ceiling Application

