

WOOD LOOK ACOUSTIC BLADES

These Acoustic Blades constructed using wood grain printed on PET acoustic felt material which offers modern style, wood look and sound absorption in a sleek and easy-to-install design. Add function and dimension to your wall and ceiling space for superior sound control.



SIZES

Length

24 in

36 in

48 in

60 in

72 in

84 in

96 in

Custom

Height

4 in

6 in

8 in

10 in

12 in

Custom

Thickness


1.5 in

2 in

Custom

All sizes are nominal. Refer to Drawing files for actual sizes.


WOOD GRAIN COLOR OPTIONS



WL01 Mountain Teak



WL02 Barrel Oak



WL03 American Reconn



WL04 Rustik Oak





WL05 Charred Oak



WL06 Winter Driftwood

Note: Colors come in recycled PET acoustic material. Custom acoustic wood look colors are available and may result in a minimal upcharge.

WOOD LOOK ACOUSTIC BLADES

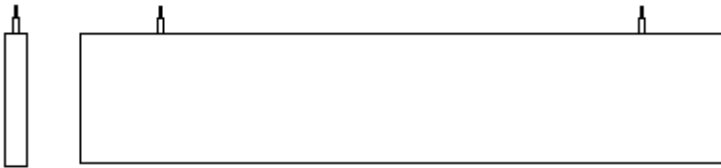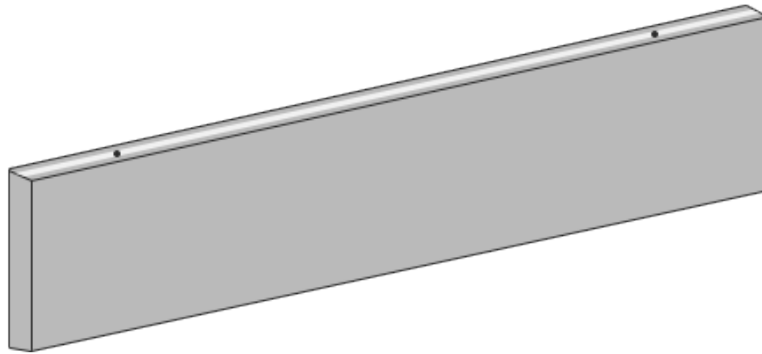

FEATURES

Our Wood Look Acoustic Blades are simple to specify and simple to install. Available in 84 standard sizes, 6 wood grain acoustic colors, you can create the perfect solution for you project.

If you have a specific size or color request, customize it! Use our product selector on our website to tell us what color or size you are looking for, and we can help you make your own beams.

- Made with lightweight panel technology.
- A sleek and modern design that adds a visually appealing element to any interior constructed with eco-friendly materials and processes.
- Finished with wood grain printed on recycled PET acoustic material. Slight color variations are expected.
- Easy to install.
- Class A fire rating, ASTM E-84 test and CAN/ULC-102
- Aircraft Cable Suspension hardware is included.
- NRC Range 0.6 to 0.8

WOOD LOOK ACOUSTIC BLADES

SPECIFICATIONS

PRODUCT

Name	Altispace Wood Look Acoustic Blades
Content	Wood grain printed on acoustic PET material, wood frame, fiberboard, honeycomb door core.
Panel Thicknesses	1.5 in, 2 in
Standard Sizes *All sizes are nominal	Lengths: 24 in, 36 in, 48 in, 60 in, 72 in, 84 in, 96 in Heights: 4 in, 6 in, 8 in, 10 in, 12 in
Durability	Contract/Commercial
Maintenance	Dust and dirt on the panels and suspension hardware can be removed with a vacuum. For stains, apply distilled water or carpet shampoo with a soft, lint-free cloth and blot dry. Refer to the Cleaning and Maintenance document for more details.
Lead Time	Products are made to order and certain lead times will apply.
Environmental	Altispace Acoustic Blades are made using eco-friendly materials and practices. See page 4 for more details. For more information, contact 226-636-5965.
Custom	Custom sizes and colors are available and may result in a minimal upcharge. Further customization (such as LED lighting integration) are also available at an upcharge.
Variation	Colors of acoustic finish on screen may vary from actual product.
Acoustics	Test reports available upon request. Refer to the Acoustic Information document for more details.
Fire Rating	Class A fire rating, ASTM E-84 test. Test reports available upon request. Refer to the Fire Rating Information document for more details.

INSTALL

Suspension Options	1) Aircraft cable (Refer to Suspension Hardware Information) 2) Unistrut System (Refer to Suspension Hardware Information) 3) Flush Mount (Refer to Suspension Hardware Information)
Ceiling Attachment Options for Suspension Cable	By installation contractor
Installation	Refer to Installation Guide for Acoustic Blades.
Unistrut Installation	Refer to Installation Guide for Acoustic Blades.

WOOD LOOK ACOUSTIC BLADES

THE ENVIRONMENT

The acoustic material is manufactured by recycling plastic bottle chips, used polyester fabric and other reused products.

THE PRODUCT

SPECS	BENEFITS
3D crimp staple fiber and recycled PET	Made from 100% polyester
Melted PET filaments joined together	No glue and adhesive
Combed filament and needle punched	Structurally rigid
Color injected into filament	Long color duration
Low water permeability and moisture absorption	Water resistant
Horizontal and vertical fibers woven together	Impact resistant
NRC ratings 0.8 with cavity	Great acoustical performance
Non toxic, no odor and low VOC	Formaldehyde free
No risk of skin irritation or respiratory problems	Great for healthy environments
Pin-able facade finishing	Versatile finish
Heat treated up to 200°	Bacteria and fungi resistant
Stable PET material and panel structure	Excellent durability
Low-carbon and environmentally friendly	Recycled and recyclable

RECYCLED CONTENT

MATERIAL	PRE-CONSUMER	POST CONSUMER	TOTAL
Dorkor	0%	100%	100%
High Pressure Laminate	0%	34%	34%
F/J Pine Frame	0%	0%	0%
Acoustic Material	45%	0%	45%