



BEAMS & BLADES INSTALLATION GUIDE



INFO@ALTISPACE.COM | WWW.ALTISPACE.COM | 226-636-5965



FLUSH MOUNT INSTALLATION GUIDE

STEP 1

Remove product from the protective packaging and review the instruction manual and ceiling or wall layout.

STEP 2


Layout and install connection hardware according to ceiling or wall layout.

- Contractor is responsible for the supply and installation of connection hardware.
- It is the responsibility of the Contractor to ensure ceilings or walls are adequately reinforced to support fixture weight. Please direct any questions as to product weight and any other technical advice to our team. Contact us at [226-636-5965](tel:226-636-5965) or email us at info@altispace.com
- Altispace is not liable for inadequately reinforced ceilings or walls.



STEP 3

Install the Flush Mount Bracket supplied by Altispace onto the ceiling or wall using contractor supplied connection hardware.

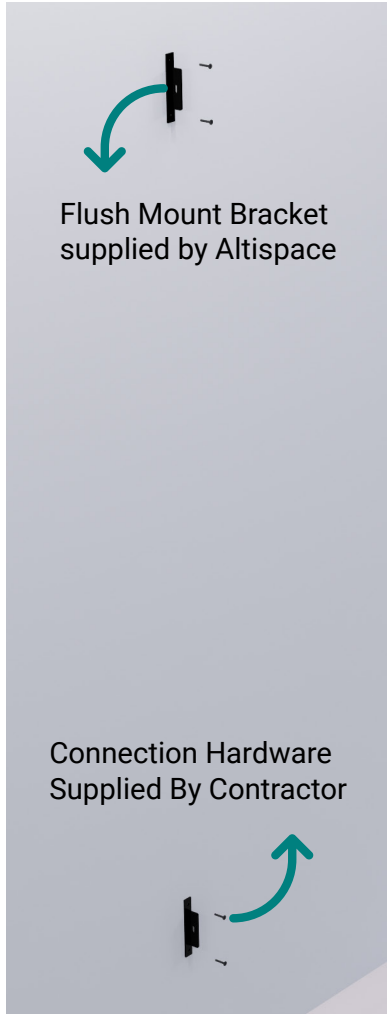

STEP 4

Install the Beam or Blade onto the Altispace supplied Bracket.



STEP 5

Attach Beam or Blade to Bracket with Altispace supplied Bolt.




Bolt supplied by Altispace



STEP 6

Install the laminate or acoustic cover cap supplied by Altispace to hide screw holes. Your Beams or Blades are now installed!

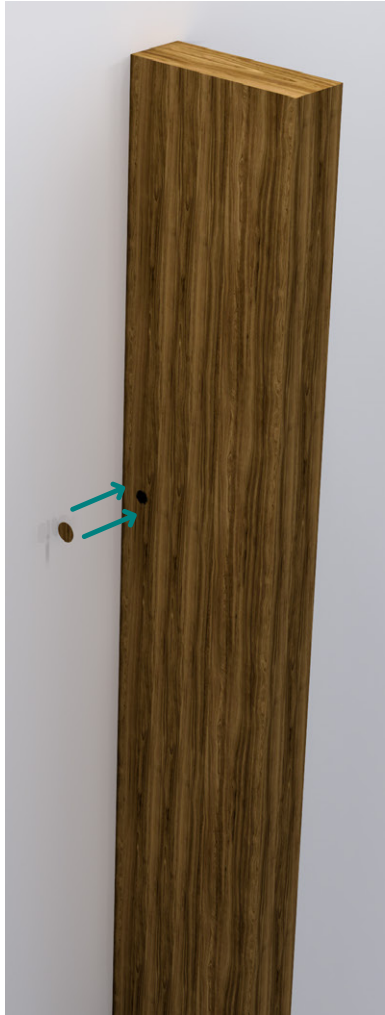

CONTACT US

We value your feedback and are committed to providing excellent customer service.

Don't hesitate to contact us, we're here to help you!

Email: info@altispace.com

Phone: 226-636-5965

Website: www.altispace.com

