ACOUSTIC SLAT WALL PANELS

FELT SERIES

Elevate your space with acoustic slats that create a clean, minimalist look. Multiple elevation options allow for a customizable aesthetic. These Acoustic Slat Wall Panels not only serve as a striking feature wall but also effectively reduce noise. Ideal for offices, commercial, and residential interiors. Form meets function in every panel.

FELT SERIES - ACOUSTIC SLAT WALL PANELS

These Acoustic Slat Wall Panels are constructed with 9mm acoustic felt slats and a 9mm acoustic felt backing. The recycled PET felt offers excellent sound absorption while adding bold contrast and a modern touch. Crafted from sustainably sourced and eco-friendly materials, these panels support green building practices. Choose from 19 standard colors and 8 wood look felt colors to match your design vision.

PANEL TYPES

Standard

Equal Felt Slat Widths

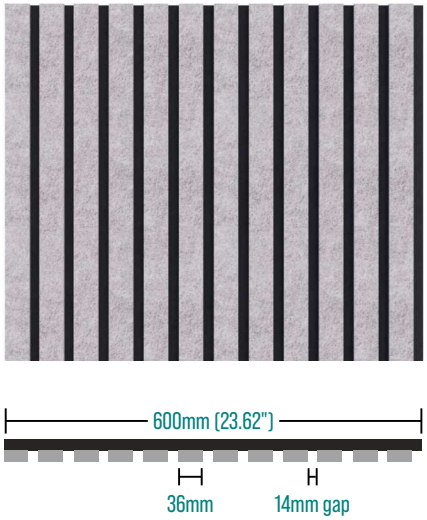

Variant

Variable Felt Slat Widths

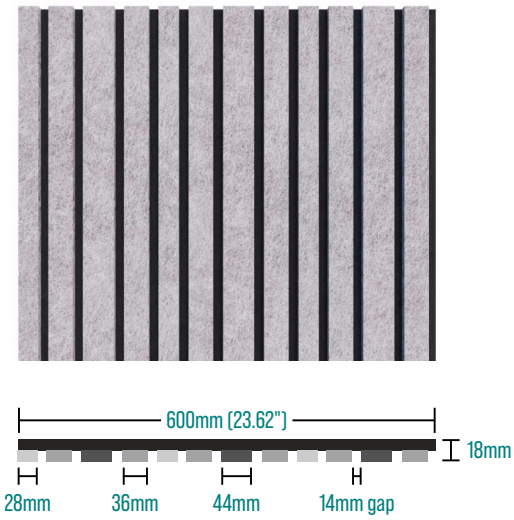

SIZES

Height

1200mm (47.25")	1800mm (70.88")	2400mm (94.50")
2700mm (106.30")	3000mm (118.13")	3600mm (141.75")

Width

600mm (23.62")

Thickness

18mm (0.75")

FEATURES

- Simple to specify
- NRC Range 0.6 to 0.7
- Made with eco-friendly materials and processes
- Fire Rating, ASTM E-84 test and CAN/ULC-102
- Easy to install in few simple steps
- Panels can be easily installed using screws or construction adhesive or nails for a quick, seamless setup

Intertek Clean Air GOLD Certified
CDPH 01350 v1.2

PANEL SPECIFICATIONS

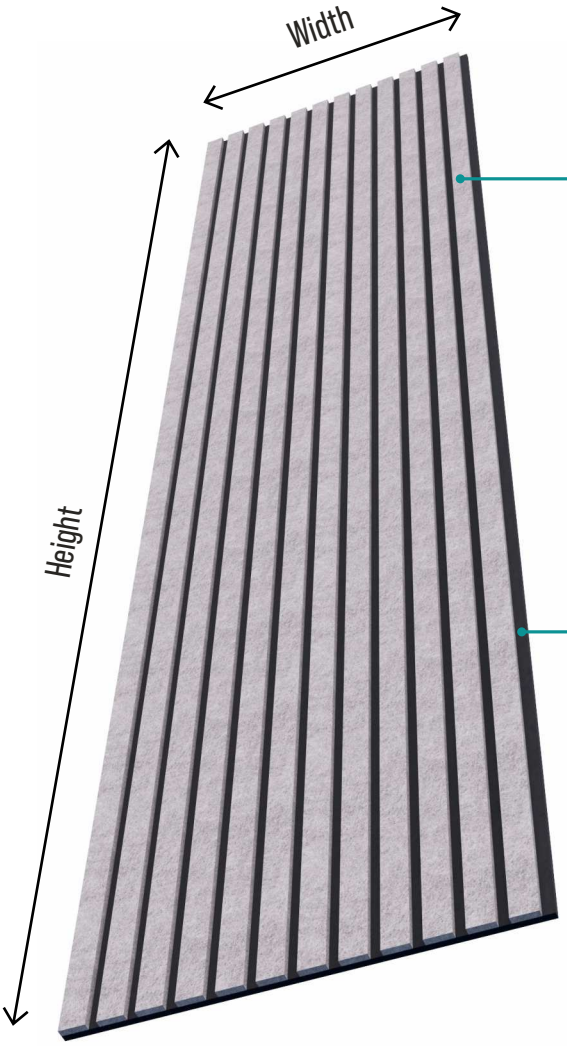

9mm thick acoustic felt slat (Available in 19 standard colors and 8 wood look felt colors or request custom colors)

9mm thick acoustic felt backing (Black, White, Charcoal Gray, Gray, Silver Gray or request custom colors)

INSTALLATION METHOD

Option 1: Apply construction adhesive to the back of the panel (adhesive specified by the contractor).

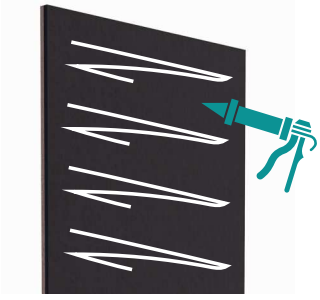

Option 2: Install screws (use appropriate screw color to match acoustic felt color).

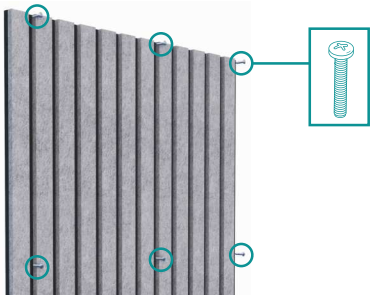

Notes: "Adhesive" and "screws" are supplied by the contractor.

FELT SERIES - ACOUSTIC SLAT WALL PANELS

ACOUSTIC COLOR OPTIONS

Light Blue
#30

Blue
#16

Dark Blue
#25

Deep Blue
#9

Light Green
#13

Green
#5

Deep Green
#11

Light Salmon
#37

Burgundy
#29

Red
#15

Orange
#31

Yellow
#22

Silver Gray
#3

Gray
#34

Charcoal Gray
#17

Black
#10

White
#7

Cream
#801

Sand
#802

Custom

Notes: Black, White, Gray, Charcoal Gray, and Silver Gray colors are available for panels up to a maximum height of 12 ft, while all other colors including wood look colors can be mixed and matched for panels up to a maximum height of 8 ft.

Colors come in recycled PET acoustic material. Slight variations in color are expected. Please request a material sample to verify felt colors.

WOOD LOOK ACOUSTIC COLOR OPTIONS

There is an additional cost for Wood Look acoustic color options.

Barrel Oak
#WL02

American Recon
#WL03

Rustik Oak
#WL04

Charred Oak
#WL05

Winter Driftwood
#WL06

Black Walnut
#WL07

Northern Hazelnut
#WL08

Natural Maple
#WL09

ACOUSTIC FELT BACKING COLOR OPTIONS

Black
#10

White
#7

Silver Gray
#3

Gray
#34

Charcoal Gray
#17

Mix & Match

Notes: Black, White, Gray, Charcoal Gray, and Silver Gray colors are available for panels up to a maximum height of 12 ft, while all other 14 acoustic colors and 8 wood look colors can be mixed and matched for panels up to a maximum height of 8 ft. Colors come in recycled PET acoustic material.

SPECIFICATIONS

Product Name	Felt Series - Acoustic Slat Wall Panels.
Content	Acoustic PET felt material.
Panel Sizes	**Height:** 1200mm (47.25"), 1800mm (70.88"), 2400mm (94.50"), 2700mm (106.30), 3000mm (118.13"), 3600mm(141.75") **Width:** 600mm (23.62") **Thickness:** 18mm (0.75")
Durability	Contract/Commercial.
Maintenance	Dust and dirt on the panels and suspension hardware can be removed with a vacuum. For stains, apply distilled water or carpet shampoo with a soft, lint-free cloth and blot dry. Refer to the Cleaning and Maintenance document for more details.
Lead Time	Products are made to order and certain lead times will apply.
Environmental	Altispace Acoustic Slat Wall Panels are made using eco-friendly materials and practices. For more information, contact 226-636-5965.
Custom	Custom standard felt and wood look felt colors are available and may result in a minimal up-charge.
Variation	Colors of acoustic PET material on screen may vary from actual product.
Acoustics	NRC rating of our Acoustic Slat Wall Panels ranging from 0.6 up to 0.7 depending on configuration of the Acoustic Slat Wall Panels. Test reports available upon request. Refer to the Acoustic Information document for more details.
Fire Rating	ASTM E-84 and CAN/ULC-102 test. Test reports available upon request. Refer to the Fire Rating Information document for more details.
Install	**Option 1:** Construction adhesive (Refer to Installation Guide). **Option 2:** Screws (Refer to Installation Guide). **Option 3:** Brad nail gun (Refer to Installation Guide).

RECYCLED CONTENT

MATERIAL	PRE-CONSUMER	POST-CONSUMER	TOTAL
Acoustic Material	45%	0%	45%

THE ENVIRONMENT

The acoustic material is manufactured by recycling plastic bottle chips, used polyester fabric and other reused products.

THE PRODUCT

SPECS	ADVANTAGES
3D crimp staple fiber and recycled PET	Made from 100% polyester
Melted PET filaments joined together	No glue and adhesive
Combed filament and needle punched	Structurally rigid
Color injected into filament	Long color duration
Low water permeability and moisture absorption	Water resistant
Horizontal and vertical fibers woven together	Impact resistant
NRC ratings 0.6 to 0.7	Great acoustical performance
Non toxic, no odor and low VOC	Formaldehyde free
No risk of skin irritation or respiratory problems	Great for healthy environments
Pin-able facade finishing	Versatile finish
Heat treated up to 200°	Bacteria and fungi resistant
Stable PET material and panel structure	Excellent durability
Low-carbon and environmentally friendly	Recycled and recyclable