



LAMINATE SERIES


Elevate your space with sleek slats that create a clean, minimalist look. Multiple elevation options allow for a customizable aesthetic. These Acoustic Slat Wall Panels not only serve as a striking feature wall but also effectively reduce noise. Ideal for offices, commercial, and residential interiors. Form meets function in every panel.

These Acoustic Slat Wall Panels are constructed with laminated MDF and a 9mm acoustic felt backing. The recycled PET felt offers excellent sound absorption while adding bold contrast and a modern touch. Crafted from sustainably sourced MDF and eco-friendly materials, these panels support green building practices. Choose from 23 HPL color options to match your design vision.

PANEL TYPES



Standard

Equal MDF Slat Widths



Variant

Variable MDF Slat Widths

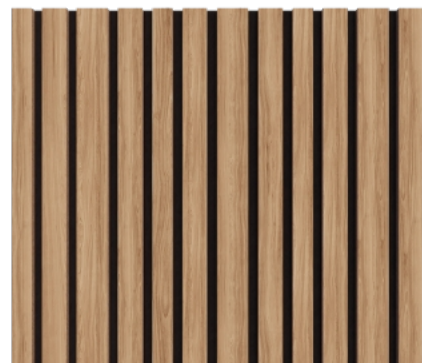

SIZES

Height

1200mm (47.25")	1800mm (70.88")	2400mm (94.50")
2700mm (106.30")	3000mm (118.13")	3600mm (141.75")

Width

600mm (23.62")

Thickness

19mm (0.75")


FEATURES

- Simple to specify
- NRC Range 0.5 to 0.6
- Made with eco-friendly materials and processes
- Fire Rating, ASTM E-84 test and CAN/ULC-102
- Easy to install in few simple steps
- Panels can be easily installed using screws and construction adhesive for a quick, seamless setup



Intertek Clean Air GOLD Certified
CDPH 01350 v1.2

PANEL SPECIFICATIONS

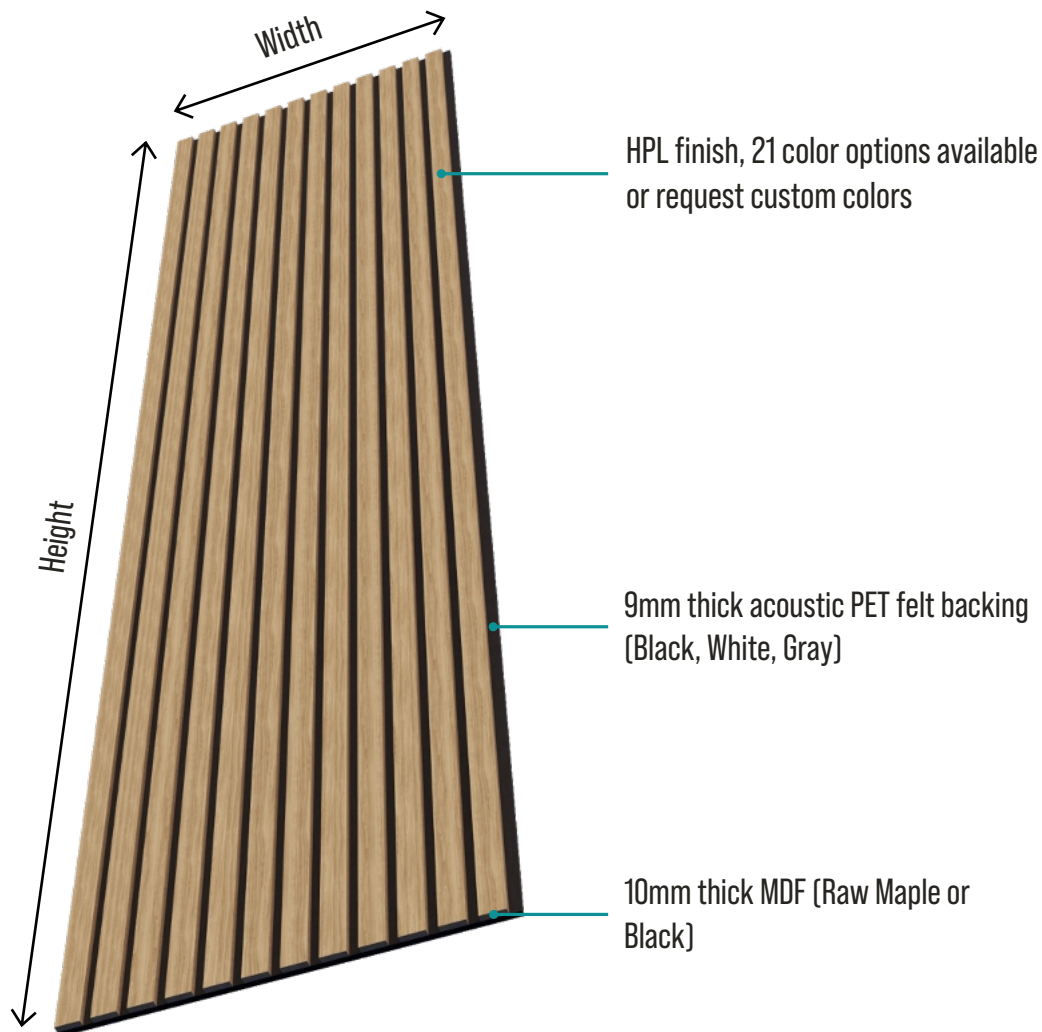


INSTALLATION METHOD

Step 1: Apply construction adhesive to the back of the panel (adhesive specified by the contractor).



Step 2: Install screws (use appropriate screw color to match acoustic felt color).

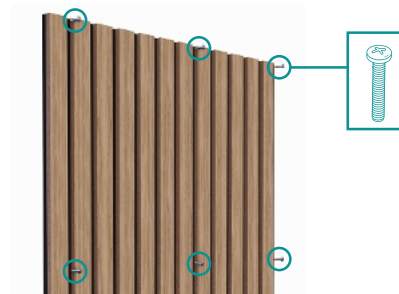

Notes: "Adhesive" and "screws" are supplied by the contractor.

LAMINATE COLOR OPTIONS

TRADITIONAL



Kensington Maple
10776-60



Tuscan Walnut
7921-38



Amber Cherry
7919-38



Shaker Cherry
7935-60

GRAY



White Driftwood
8200K-16



5th Ave. Elm
7966K-12



Portico Teak
8210K-28




Asian Night
7949K-60


PROGRESSIVE




Beigewood
7850-60



Fawn Cypress
8208K-16



Park Elm
7967K-12



Walnut Heights
7965-38



Veranda Teak
8209-28



NeoWalnut
7991-38




Studio Teak
7960-38



Ebony Recon
7997-38

SOLID



Designer White
D354-60



Platinum
D315-60




North Sea
D90-60



Black
1595-60

NEW



Valley Forge Elm
8231-79




Friston Ash
8229-79




Custom

Notes: Colors come in standard HPL laminate finish. Custom colors and finishes are available and may result in a minimal upcharge. Paint-grade finish is also available. If you have a specific laminate in mind that's not in our collection, we can accommodate any commercially available laminate from Wilsonart, Formica, Arborite, Pionite and Nevamar.


ACOUSTIC FELT BACKING COLOR OPTIONS




Black
#10



White
#7



Charcoal Gray
#17




Gray
#34



Silver Gray
#3



Raw Maple



Black

Notes: Colors come in recycled PET acoustic material. Custom colors available for panels up to a maximum height of 8 ft. Refer to our color guide. Slight variations in color are expected. Please request a material sample to verify felt colors.

MDF COLOR OPTIONS

SPECIFICATIONS

Product Name	Laminate Series - Acoustic Slat Wall Panels.
Content	Laminate material, MDF slats, acoustic PET felt material.
Panel Sizes	Height: 1200mm [47.25"], 1800mm [70.88"], 2400mm [94.50"], 2700mm [106.30], 3000mm [118.13"], 3600mm[141.75"] Width: 600mm [23.62"] Thickness: 19mm [0.75"]
Durability	Contract/Commercial.
Maintenance	Dust and dirt on the panels and suspension hardware can be removed with a vacuum, and wipe off excess dirt or fingerprints by wiping them with a clean, dry and soft cloth. If this does not fully clean the panel, you can use a clean, damp and soft white cloth or sponge with a mild detergent to wipe down the MDF slats. Refer to the Cleaning and Maintenance document for more details.
Lead Time	Products are made to order and certain lead times will apply.
Environmental	Altispace Acoustic Slat Wall Panels are made using eco-friendly materials and practices. For more information, contact 226-636-5965.
Custom	Custom HPL, solid felt and wood look felt colors are available and may result in a minimal up-charge.
Variation	Colors of acoustic PET material on screen may vary from actual product.
Acoustics	NRC rating of our Acoustic Slat Wall Panels ranging from 0.5 up to 0.6 depending on configuration of the Acoustic Slat Wall Panels. Test reports available upon request. Refer to the Acoustic Information document for more details.
Fire Rating	ASTM E-84 and CAN/ULC-102 test. Test reports available upon request. Refer to the Fire Rating Information document for more details.
Install	Step 1: Apply construction adhesive to the back of the panel (Refer to Installation Guide). Step 2: Install screws (Refer to Installation Guide).

RECYCLED CONTENT

MATERIAL	PRE-CONSUMER	POST-CONSUMER	TOTAL
Acoustic Material	45%	0%	45%
MDF	81%	0%	81%
High Pressure Laminate	0%	34%	34%